

# D'ARBRE

## D'ARBRE OAK FLOORS SPECIFICATION

Example and cross section of a D'Arbre Engineered plank

220mm Wide Board


4mm Oak Top Layer

11mm Multi Layered EUC Plywood

Core

2200mm Length

8 Coat Treffert Coating System

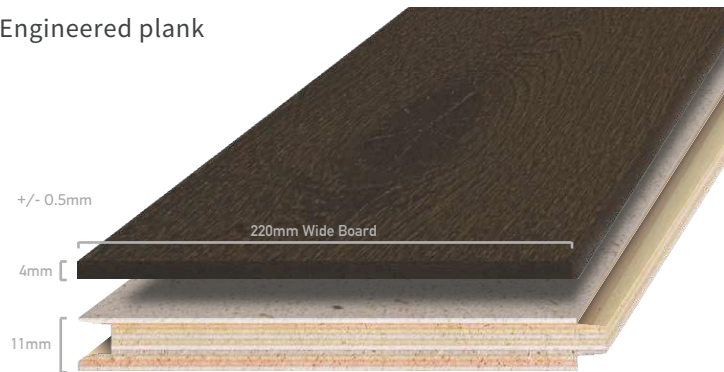

## TREFFERT SAPPHIRE™ COATING SYSTEM

### Features and Benefits

TREFFERT Sapphire™ is the best performing scratch-resistant coating system for flooring in the market today. This special coating is ideally suited for surfaces in demanding environments or needing long time guarantees.

Tested to reflect real life, it has both exceptional linear as well as rotational scratch resistance. It is highly resistant to scratches during transport, installation and use meaning your D'Arbre floor stays looking like new longer.

### Layer Construction

|                                     |                       |
|-------------------------------------|-----------------------|
| Layer 1. UV PU Insulation           | 15 g/m <sup>2</sup>   |
| Layer 2. UV Hard Filler Transparent | 20 g/m <sup>2</sup>   |
| Layer 3. UV Hard Filler Transparent | 20 g/m <sup>2</sup>   |
| Layer 4. UV Duro Sealer             | 20 g/m <sup>2</sup>   |
| Layer 5. UV Hard Sealer Transparent | 20 g/m <sup>2</sup>   |
| Layer 6. UV Hard Sealer Transparent | 20 g/m <sup>2</sup>   |
| Layer 7. Topcoat                    | 7-10 g/m <sup>2</sup> |
| Layer 8. Topcoat                    | 7-10 g/m <sup>2</sup> |